

SOLO
INFO TECH

Un nuovo singolo inedito,
una traccia unica nel suo genere.
La riproposizione in chiave elettronica
di sonorità provenienti dall'Africa.
Un mix di suoni scaturito da una pietra tipica
delle zone dell'Angola si divulga attraverso
un'esplosione di tonalità che ne
contraddistinguono la sua particolare essenza.
IL NOSTRO ASSOLO E PENSIAMO SIA DA PAURA.

A new unedited single, a unique track
in its kind. A re-proposal, in electronic key,
of sounds from Africa.
A mix of sounds deriving from a typical stone
of the Angolan areas reveals itself through an
explosion of shades that distinguish its
particular essence.
OUR ACE, OUR WINNER.



TECHNICAL DETAILS


SOLO

TECHNOLOGY PORCELLANATO DIGITALE HD AD IMPASTO COLORATO - HD DIGITAL COLORED BODY PORCELAIN

FINISH OPACO RETTIFICATO - NATURAL RECTIFIED

THICKNESS 9 MM


SOLO SIZES



80X80 32"X32"




40X80 16"X32"




OUT 40X80 16"X32"




5X80 2"X32"



60X120 24"X48"




MOSAIC 3X3
NET 30X30 12"X12"



SKIRTING 7,5X80 3"X32"

GRAPHIC NR. 16 (80X80)

SOLO COLORS

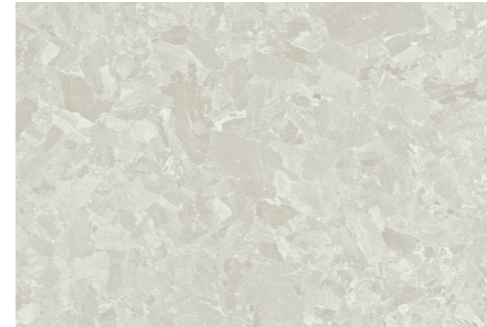

WHITE



GREY



BLACK

SOLO CODES

SIZE	White	Grey	Black
60x120 ^{24"x48"}	4100510	4100511	4100512
80x80 ^{32"x32"}	4100513	4100514	4100515
40x80 ^{16"x32"}	4100504	4100505	4100506
Out 40x80 ^{16"x32"}	4100507	4100508	4100509
5x80 ^{2"x32"}	4100551	4100552	4100553
Mosaic	4100545	4100546	4100547
Skirting	4100571	4100572	4100573

SOLO TECHNICAL FEATURES



NORMA STANDARD	CARATTERISTICHE FEATURES	VALORE PRESCRITTO REQUIRED VALUE	SOLO
ISO 10545/2	DIMENSIONI - SIZE		
	lunghezza e larghezza length and width	± 0,6 % / ± 2 mm	± 0,6 % / ± 2 mm
	spessore thickness	± 5 % ± 0,5 mm	± 5 % ± 0,5 mm
	rettilinearità degli spigoli straightness of sides	± 0,5 % ± 1,5 mm	± 0,5 % ± 1,5 mm
	ortogonalità wedging	± 0,5 % ± 2 mm	± 0,5 % ± 2 mm
	planarità flatness	± 0,5 % ± 2 mm	± 0,5 % ± 2 mm
ISO 10545/3	assorbimento d'acqua water absorption	≤ 0,5 %	0,3 %
ASTM C373	water absorption	≤ 0,5 %	meets the standards
ISO 10545/9	resistenza agli sbalzi termici thermal shock	nessuna alterazione visibile no visible alteration	resiste resistant
ASTM C484	thermal shock	unaffected	unaffected
ISO 10545/12	resistenza al gelo frost/freeze resistance	nessuna alterazione visibile no visible alteration	resiste resistant
ASTM C1026	frost/freeze resistance	unaffected	unaffected
ISO 10545/13	resistenza agli attacchi chimici chemical resistance	nessuna alterazione visibile no visible alteration	resiste resistant
ASTM C650	chemical resistance		unaffected
ISO 10545/4	resistenza alla flessione breaking strength	≥ 35 N/ mm ²	48 N/ mm ²
ISO 10545/7	resistenza all'abrasione visible abrasion resistance		PEI IV Black PEI V White/Grey
ASTM C1027	visible abrasion resistance	CLASS I-V	C.IV Black PEI V White/Grey
ISO 10545/14	resistenza alle macchie stain resistance	≥ CLASSE 3	5
ASTM C1378	stain resistance	≥ CLASSE 3	5
DIN EN 16165	scivolosità anti-slip		Solo R10 Solo OUT R11
DCOF	dynamic coefficient of friction	> 0,42	Solo 0,62 Solo OUT 0,76
ANSI A137.1	aesthetic classes	V0-V4	V2

SOLO PACKING

SOLO	pcs	m ²	kg/box	box/pal	m ² /pal	kg/pal	thickness
60x120 ^{24"x48"}	2	1,44	27,90	30	43,20	838,10	9 mm
80x80 ^{32"x32"}	2	1,28	24,80	40	51,20	993,30	9 mm
40x80 ^{16"x32"}	3	0,96	19,50	56	53,76	1042,90	9 mm
5x80 ^{2"x32"}	7	0,28	5,43	104	29,12	564,93	9 mm
Mosaic	10	-	17,46	-	-	-	9 mm
Skirting	7	5,60 ml	8,15	-	-	-	9 mm

SOLO GROUTS

SOLO	colori stucchi consigliati / advised grouts colors
WHITE	Kerakoll KK 2
GREY	Kerakoll KK 6
BLACK	Kerakoll KK 12